
Data Sheet

EN-Series - Valve Regulated Lead Acid Battery EN320-2

SPECIFICATIONS			
Nominal voltage	2	V	
10-hr rate Capacity to 10.8V at 20°C	326	Ah	
10-min rate Constant Power to 1.6V/cell at 20°C	1344	Watts	
DIMENSIONS			
Length	206 (±2)	mm	
Width	210 (±1)	mm	
Height	240 (±1)	mm	
(height over terminals)	N/A	mm	
Mass (typical)	24.0	kg	
TERMINAL TYPE			
Threaded terminal - (M=Male or F=Female)	M8 (F)	mm	
Torque	6 (±0.5)	Nm	
OPERATING TEMPERATURE RANGE			
Storage (in fully charged condition)	-20°C t	-20°C to +50°C	
Charge	-15°C t	-15°C to +50°C	
Discharge	-20°C t	o +60°C	
STORAGE			
Capacity loss per month at 20°C (approx)		%	
CASE MATERIAL			
Flame retardant	ABS (UL94:V0)		
CHARGE VOLTAGE	•		
Float charge voltage at 20°C	2.26 (±1%) 2.26 (±1%)	V V/cell	
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C	
Boost charge at 20°C	2.40 (±2%) 2.40 (±2%)	V V/cell	
Boost Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C	
CHARGE CURRENT	•		
Float charge current limit	No limit	Α	
Boost charge current limit	81.50	Α	
MAXIMUM DISCHARGE CURRENT			
1 second	3000	Α	
1 minute	1920	Α	
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE			
(according to EN IEC 60896-21)			
Internal resistance		mû	
Short-Circuit current	3600	A	
IMPEDANCE			
Measured at 1 kHz	0.6	ml	
PERFORMANCE & CHARACTERISTICS			
Refer to the technical manual	EN		
DESIGN LIFE			
EUROBAT Classification: High Performance	- 10.		
EUROBAT Classification: Long Life	12+	years	
Yuasa design life @ 20°C SAFETY	12	years	

ENDURANCE EN320-2 2V,320Ah

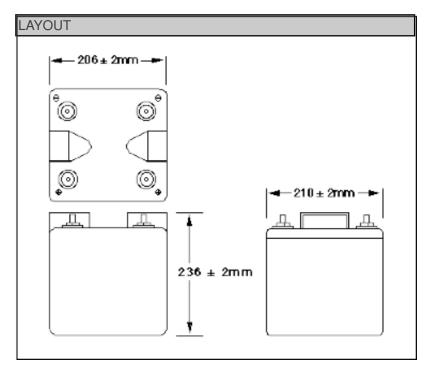

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems ISO 14001 - Environmental Management Systems EN 18001 - OHSAS Management Systems

UNDERWRITERS LABORATORIES Inc.



STANDARDS

IEC61056 IEC60896-21/22







ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.1 / Issue Date: July 2010



YUASA BATTERY SALES UK LTD. Unit 22 Rassau Industrial Estate Ebbw Vale Gwent **NP23 5SD** UK

|SAFETY

Installation Can be installed and operated in any orientation except permanently inverted

Handles

Batteries must not be suspended by their handles (where fitted)

Vent valves

Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

Gas Release

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations