


Premium Series (HDMI Interface)

3D Comb Filter

The 3D Comb Filter device will separate luminance signal from color signal and reduce the flicker and interference to provide clear and best video quality.

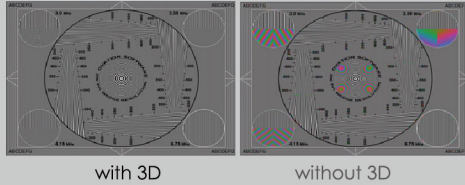

De-Interlace


De-interlacing function will decrease jittering and eliminate the sawtooth image to improve image quality and provides sharper resolution.




(HDMI Interface)

EL-17MC1RF 17" monitor


EL-17MC2RF 17" monitor



- Professional Design for CCTV 7-24 Long Time Operation.
- Professional Metal Cabinet Design
- 7 International Language OSD Menu
- HDMI Input (DVI compatible)
- PIP/PBP Function
- BNC Video Looping Out
- 3D NR (3D Noise Reduction) Function
- High Resolution (1280 x 1024)
- Remote Controller
- Anti Burn-in function to Prevent Panel from Burn-In

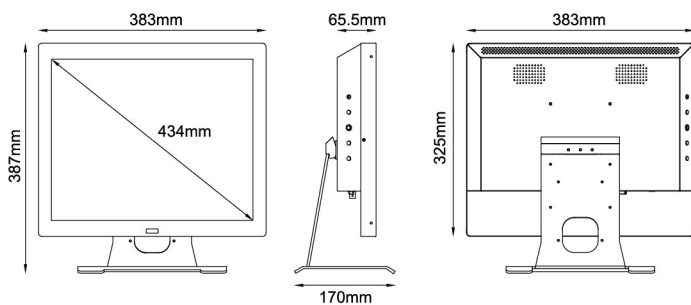


EL-17MC1RF | EL-17MC2RF

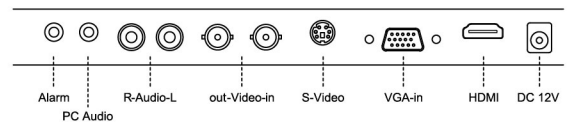


(HDMI Interface)

EL-19MC1RF 19" monitor


EL-19MC2RF 19" monitor



- Professional Design for CCTV 7-24 Long Time Operation.
- Professional Metal Cabinet Design
- 7 International Language OSD Menu
- HDMI Input (DVI compatible)
- PIP/PBP Function
- BNC Video Looping Out
- 3D NR (3D Noise Reduction) Function
- High Resolution (1280 x 1024)
- Remote Controller
- Anti Burn-in function to Prevent Panel from Burn-In

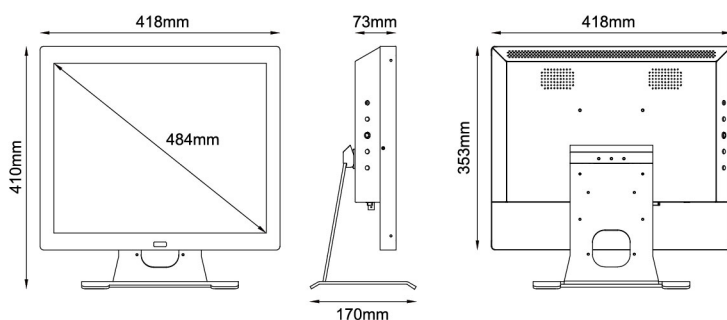

EL-19MC1RF | EL-19MC2RF

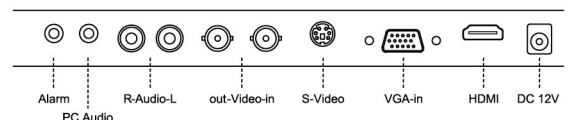

ID remote control

Exland's remote controller has the professional "ID" function to control each individual LCD Monitor, especially when it's used in the "TV wall" control. It has 999 codes to define the No. of each LCD monitor and control the selected No. LCD monitor you want.



Alarm Trigger

Connect the Ø 3.5mm Alarm cable to DVR alarm output and provide +3~5V DC Voltage to trigger the PIP, the sub screen will show the "Alarm Message" you setup on the DVR.



Specification

Model		EL-17MC1RF / EL-17MC2RF	EL-19MC1RF / EL-19MC2RF
System	Panel Size	17" LCD (CCFL Backlight)	19" LCD (CCFL Backlight)
	Resolution	1280 x 1024	1280 x 1024
	Pixel Pitch (H x V)	0.264(H) x 0.264(V)	0.294(H) x 0.294(V)
	Contrast Ratio	1000:1	1000:1
	Luminance	250 cd/m ²	250 cd/m ²
	Aspect Ratio	4:3	4:3
	Viewing Angle	U/D: 75/85, L/R: 85/85	U/D: 75/85, L/R: 85/85
	Response Time	Tr+Tf=5 ms	Tr+Tf=5 ms
	Video Signal	Analog RGB Signal, Composite	Analog RGB Signal, Composite
		1.0Vp-p/75 ohm, Y:1.0Vp-p,C:0.3Vp-p	1.0Vp-p/75 ohm, Y:1.0Vp-p,C:0.3Vp-p
Operation Interferences	Video Color System	NTSC/PAL Auto Scanning	NTSC/PAL Auto Scanning
	Scan Frequency	H:31K~81KHz, V:56~75Hz	H:31K~81KHz, V:56~75Hz
	Front Panel Controls	Source/Exit, -/▼, Power, +/▲, Menu/Enter	Source/Exit, -/▼, Power, +/▲, Menu/Enter
	Indicators	LED (Power on:Green--> Standby: Orange)	LED (Power on:Green--> Standby: Orange)
Input / Output Connector	OSD Control	Yes	Yes
	OSD Language	English,France, Germany, Spanish,Italiano, Russian,Traditional Chinese (7)	English,France, Germany, Spanish,Italiano, Russian,Traditional Chinese (7)
Input / Output Connector	Input Connector	D-Sub x 1, HDMI x 1, S-Video x 1, Video Input(BNC Jack) x 1, RCA Audio(R/L) x 1, Alarm trigger (Ø 3.5 Jack) x1, PC Audio Input (Ø 3.5 Jack) x1, Power Input (DC 12V/5A) x 1	D-Sub x 1, HDMI x 1, S-Video x 1, Video Input(BNC Jack) x 1, RCA Audio(R/L) x 1, Alarm trigger (Ø 3.5 Jack) x1, PC Audio Input (Ø 3.5 Jack) x1, Power Input (DC 12V/5A) x 1
	Output Connector	Video Output(BNC) x 1	Video Output(BNC) x 1
Mechanical & Electrical Design	PIP & PBP	Yes	Yes
	Video Output Looping	Yes	Yes
	3D Comb Filter	Yes	Yes
	De-interlace	Yes	Yes
	Power Failure Auto Recovery	Yes	Yes
	Anti Burn-in	Yes	Yes
	3D Noise Reduction	Yes	Yes
	Pro 5 Image Ratio	Yes	Yes
	VESA Mounting	100 x 100 mm	100 x 100 mm
	Front Bezel Material	Metal	Metal
	Back Cabinet Material	Metal	Metal
	Stand Material	Metal	Metal
	Audio Power Output	5W x 2	5W x 2
	Power	DC 12V/5A	DC 12V/5A
	Power Consumption	25W	30W
	Working Temperature	5~+40 °C	5~+40 °C
	Working Humidity	20% ~ 85%RH	20% ~ 85%RH
	Unit Dimension(WxHxD) mm	383(W) x 387(H) x 170(D) mm	418(W) x 410(H) x 170(D) mm
	Packing Dimension(WxHxD) mm	500(W) x 500(H) x 213(D) mm	500(W) x 500(H) x 213(D) mm
Accessory	Net Weight	5.2 Kg	6.6 Kg
	Gross Weight	7.4 Kg	8.8 Kg
	Regulatory	CE,FCC,RoHS	CE,FCC,RoHS
	Color	Black	Black
	Power Cable	1	1
	Power Adaptor	AC 100~240V, 50/60Hz : output :DC 12V, 5A	AC 100~240V, 50/60Hz : output :DC 12V, 5A
	Adaptor Holder	Optional	Optional
	D-Sub VGA Cable	1	1
	3.5mm Audio Cable	1	1
	ID Remote Controller	1 (With 999 ID Codes)	1 (With 999 ID Codes)
	User Manual (CD)	1	1

※Specifications and product design are subject to change without notice.