


Test Lead XPF-480/2G

Highly flexible test leads. One end with Ø 2 mm test probe made of stainless steel with a thread for use with screw-on acces-

series, offering various contacting possibilities. The other end with in-line or right angled

Ø 4 mm MULTILAM plug with rigid insulating sleeve. Supplied with protective cap.

XPF-480/2G

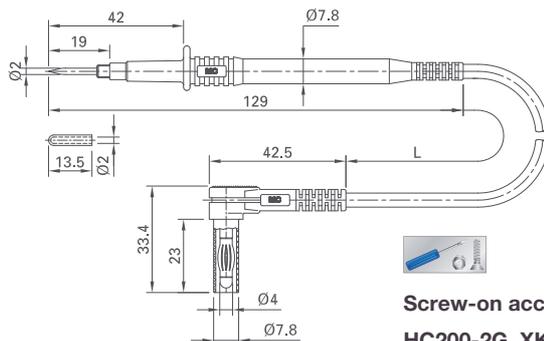


Screw-on accessories
HC200-2G, XKK-200-2G, see below

| Order No. | Type | Rated voltage/current | Lead | | Lead lengths L [cm] | *Colors |
|------------|------------|-----------------------|--------------------------|---------------|---------------------|---------|
| 66.9645-□* | XPF-480/2G | 1000 V, CAT II / 15 A | PVC 0,75 mm ² | Ni CE c UL US | 100 150 | 21 22 |

Accessories


HC200-2G



Hook Clip with rigid hook. Grasped objects are pressed against the tip of the insulator under spring pressure. Internal thread for

attachment to the probes of the test leads XPF-480/2G, see above.

XKK-200-2G

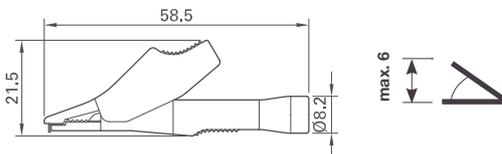

Test Clip with all-round insulation. Toothed gripping jaws with fine-wire clamping surface.

Internal thread for attachment to the probes of the test leads XPF-480/2G, see above.

| Order No. | Type | Rated voltage/current | | *Colors |
|-----------|------------|-----------------------|-------|---------|
| 66.9473-* | HC200-2G | 1000 V, CAT II / 5 A | Ni CE | 21 22 |
| 66.9091-* | XKK-200-2G | 600 V, CAT II / 10 A | Ni CE | 21 22 |